


RTXM182-829 & RTXM182-830




RTXM182-829	RTXM182-830	1.25Gb/s	LC	SFP	PIN
			EEPROM	-	.

LC
3.3V
1.25Gb/s
PECL
40
: -40°C ~+85°C
RoHS

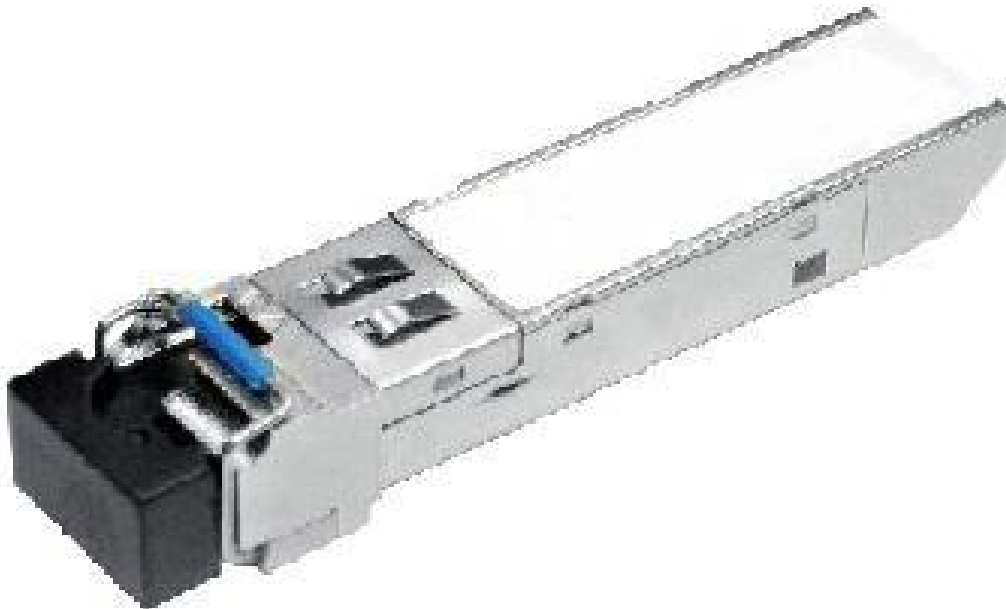

A (IN 30

ITU-T G.957



1.25Gbps 23

RTXM182-829	SFP	1.25G	1310nm DFB-LD	-3~+2 dBm	PIN 1490nm	< -24dBm	-40~85° C	40km	GE
RTXM182-830	SFP	1.25G	1490nm DFB-LD	-3~+2 dBm	PIN 1310nm	< -24dBm	-40~85° C	40km	GE