


330-551	25.7	/	- 472
- 402, - 432 - 431	2		- 472

100 (4)

1.2
0 70
+3.3 5%
- 472

25 -

- 472
- 402
- 432
- 431

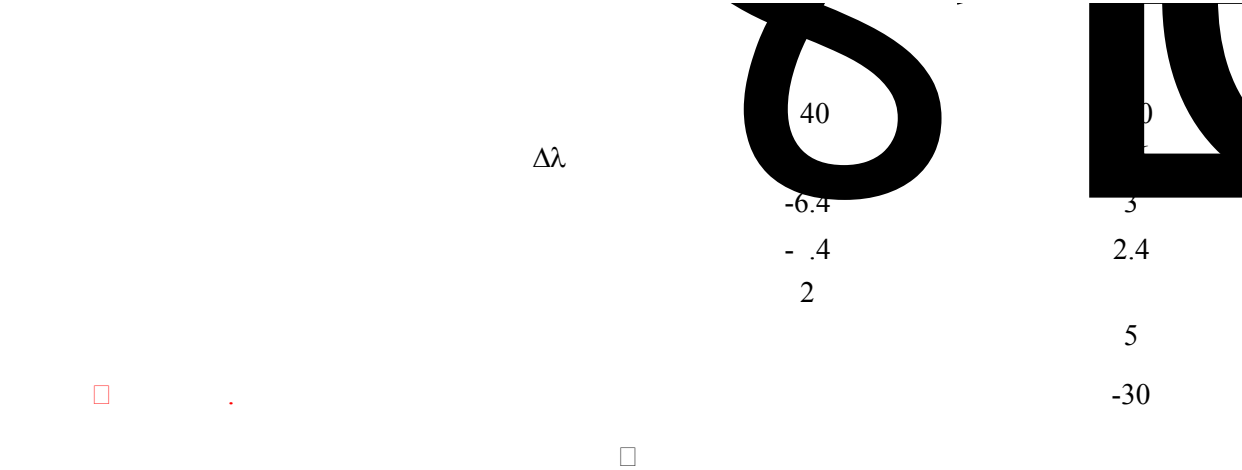

		(/)		()		()		()		
RTXM330-551	SFP+	25.7	VCSEL	- .4 2.4	PIN	< -5.2	0~70 °C	100m	DDM	25 -

	V _{CC}		3.14	3.3	3.46
	I _{CC}				350
Transmitter					
	R _{IN}	Ω	80	100	120
	V _{IN}	-	90		800
	V _{DIS}		2		V _{CCHOST}
	V _{EN}		V _{EE}		V _{EE} +0.8
	V _{FA}		2.2		V _{CCHOST}
-	V _{FDA}		V _{EE}		V _{EE} +0.4
Receiver					
	V _{OD}	-	185		425
	V _{LOSFT}		2.2		V _{CCHOST}
	V _{LOSNR}		V _{EE}		V _{EE} +0.4