# * %V P 6 ) 3 Q P 7 U D Q V F H L Y H U V

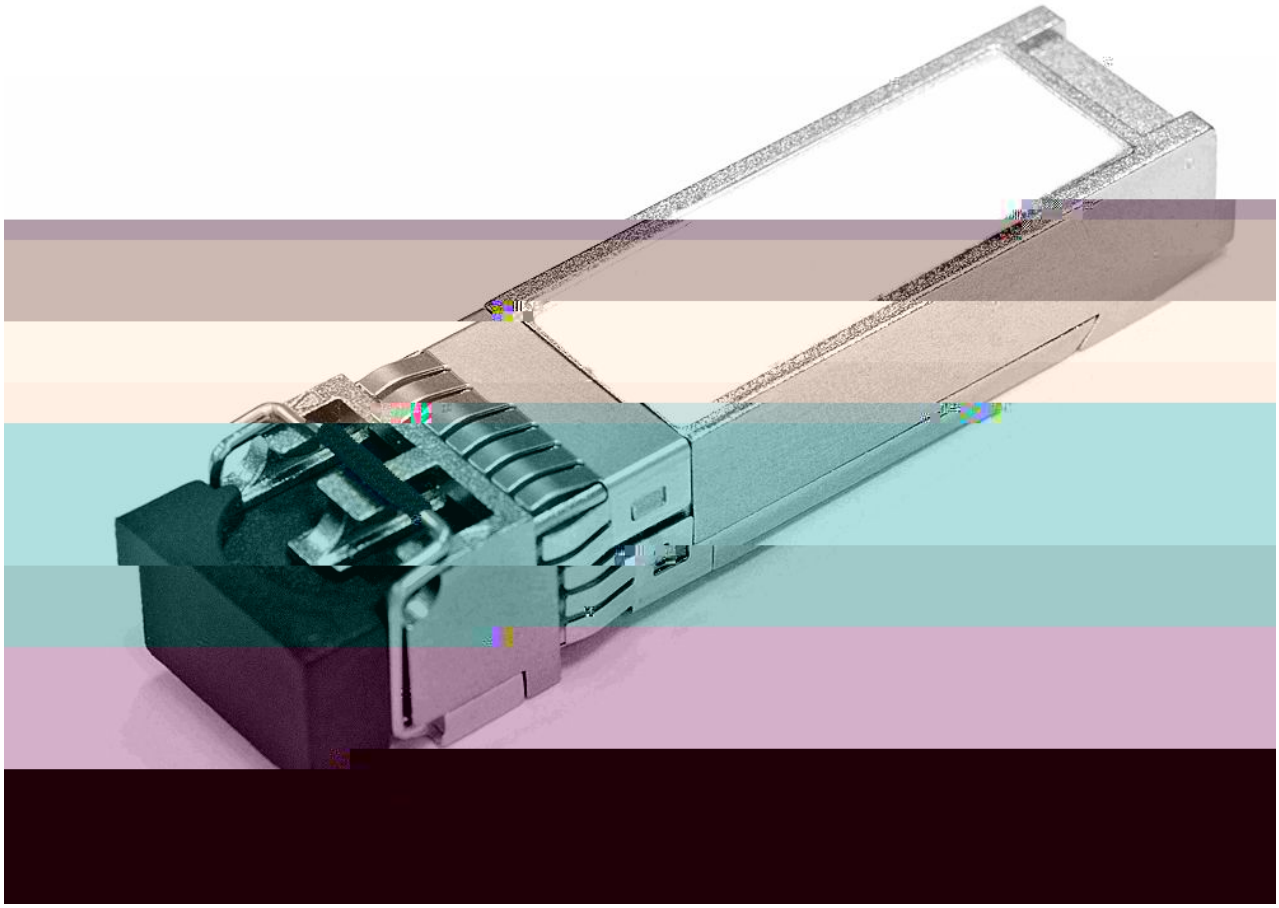

Product Introduction

The RTXM228-610 850nm optical Transceiver supports high speed serial links over multimode optical fiber at signaling rates for wireless base station applications involving the OBSAI or CPRI data, as well as related applications. The transceiver is compliant with SFF-8431 and SFF-

- Hot pluggable 20pin connector
- Low power consumption<1.0W
- -40